



Universität Hamburg

DER FORSCHUNG | DER LEHRE | DER BILDUNG

MIN Faculty  
Department of Informatics



# Introduction to Robotics

## Lecture 1

**Lasse Einig, Jianwei Zhang**

[einig, zhang]@informatik.uni-hamburg.de



University of Hamburg  
Faculty of Mathematics, Informatics and Natural Sciences  
Department of Informatics

Technical Aspects of Multimodal Systems

April 05, 2018

**Lecture:** Friday 10:00 c. t. - 12:00 c. t.  
**Room:** F-334  
**Web:** <http://tams.inf...burg.de/lectures/>

**Name:** Prof. Dr. Jianwei Zhang  
**Office:** F-330a  
**E-mail:** [zhang@informatik.uni-hamburg.de](mailto:zhang@informatik.uni-hamburg.de)  
**Consultation:** by arrangement

**Secretary:** Tatjana Tetsis  
**Office:** F-311  
**Tel.:** +49 40 42883-2430  
**E-mail:** [tetsis@informatik.uni-hamburg.de](mailto:tetsis@informatik.uni-hamburg.de)

|                      |   |
|----------------------|---|
| <b>Exercises</b>     | Friday 8:00 c. t. - 10:00 c. t. /   |
| <b>/RPC:</b>         | Friday 10:00 c. t. - 12:00 c. t. (alternating)<br>see website for dates               |
| <b>Room:</b>         | F-334/F-304   |
| <b>Web:</b>          | <a href="http://tams.inf...burg.de/lectures/">http://tams.inf...burg.de/lectures/</a> |
| <b>Name:</b>         | Lasse Einig   |
| <b>Office:</b>       | F-324   |
| <b>Tel.:</b>         | +49 40 42883-2504   |
| <b>E-mail:</b>       | <a href="mailto:einig@informatik.uni-hamburg.de">einig@informatik.uni-hamburg.de</a>  |
| <b>Consultation:</b> | by arrangement (eMail)  |


- ▶ See website for more information

<http://tams.informatik.uni-hamburg.de/lectures/2019ss/vorlesung/itr>



## Criteria for Course Certificate:

- ▶ min. 50% of points in the exercises
  - ▶ min. 33% in each exercise
- ▶ regular presence in exercises and RPC
- ▶ presentation of two (sub-)tasks
- ▶ solutions in groups of 2–3
  - ▶ no solo submission
  - ▶ each member of a group must be able to present the tasks
  - ▶ failure to present results in 0 points

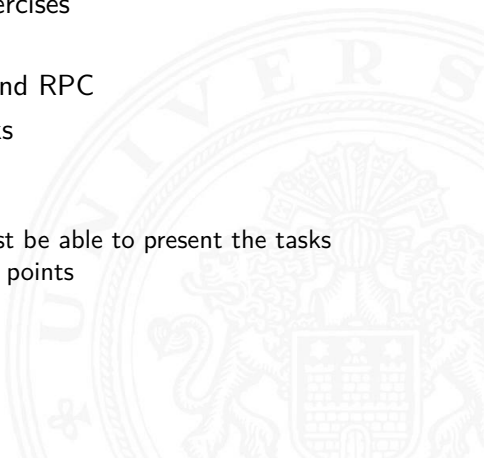


- ▶ Basics in physics
  - ▶ basics of electrical engineering
- ▶ Linear algebra
- ▶ Elementary algebra of matrices
- ▶ Related computer skills
  - ▶ git (RPC)
  - ▶ Linux (RPC)
  - ▶ access to `mafiasi.de` and pool computers
  - ▶ Python (RPC and Exercises)
  - ▶ Matlab (Exercises, recommended)

## Own Hardware

You may use your own laptop for the RPC (but not recommended). If you do, you require a Ubuntu 16.04 (Live or Virtual Machine) and fully installed `ros-kinetic-desktop-full`



- ▶ Mathematic concepts
  - ▶ description of space and coordinate transformations
  - ▶ kinematics
  - ▶ dynamics
- ▶ Control concepts
  - ▶ movement execution
- ▶ Programming aspects
  - ▶ ROS, URDF, Kinematics Simulator
- ▶ Task-oriented movement and planning

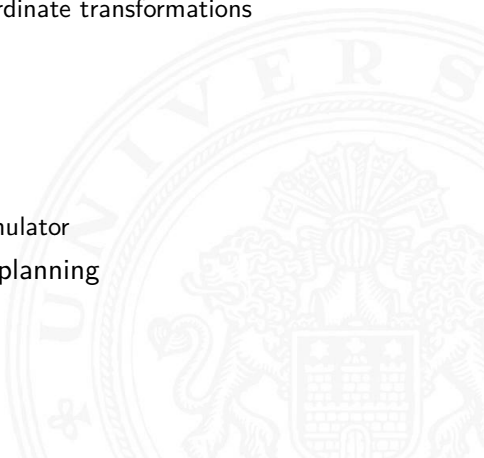

## Introduction

- Basic terms

- Robot Classification

## Coordinate systems

## Kinematic Equations

## Robot Description

## Inverse Kinematics for Manipulators

## Differential motion with homogeneous transformations


## Jacobian

## Trajectory planning

## Trajectory generation

## Dynamics

## Principles of Walking

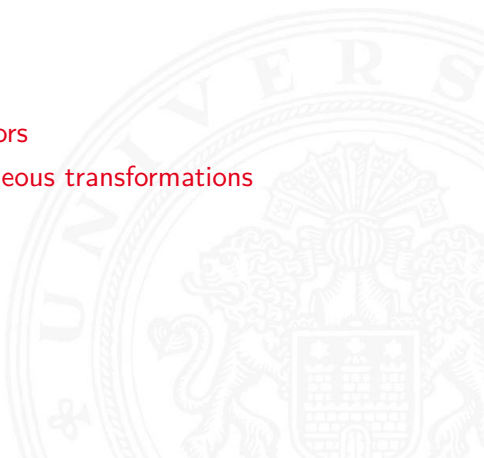





# Outline (cont.)

Introduction

Introduction to Robotics

Robot Control

Task-Level Programming and Trajectory Generation

Task-level Programming and Path Planning

Task-level Programming and Path Planning


Architectures of Sensor-based Intelligent Systems

Summary

Conclusion and Outlook




# Components of a robot

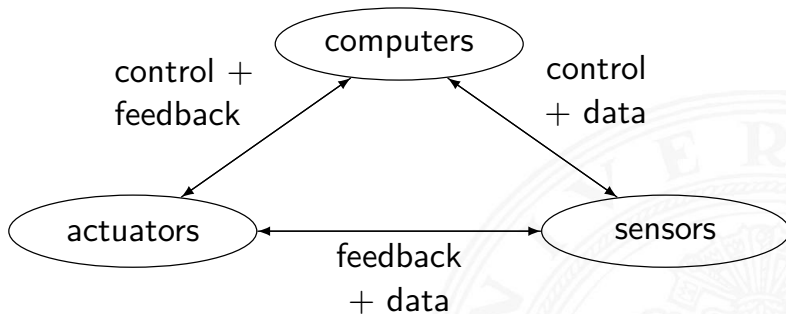

## Robotics

Intelligent combination of computers, sensors and actuators.

# An Interdisciplinary Field

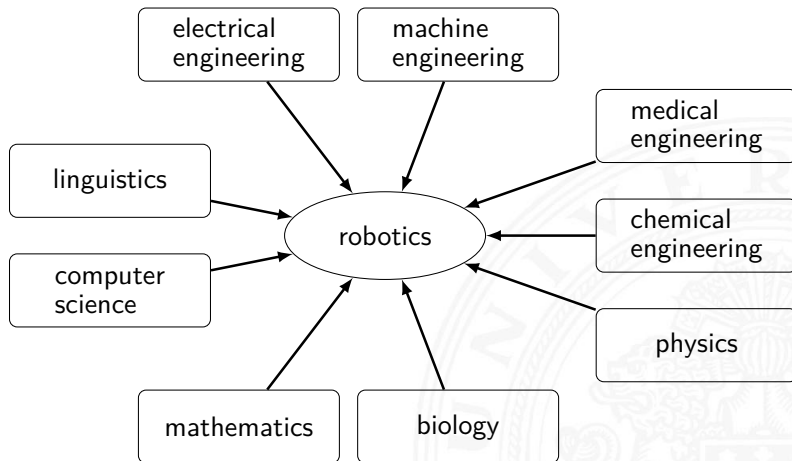

According to RIA<sup>1</sup>, a robot is:

*...a reprogrammable and multifunctional manipulator, devised for the transport of materials, parts, tools or specialized systems, with varied and programmed movements, with the aim of carrying out varied tasks.*

## Intelligent System

Is such a robot also an intelligent system?

---

<sup>1</sup>Robot Institute of America

# Background of Some Terms

**Robot** became popular through a stage play by Karel Čapek in 1923, being a capable servant.

**Robotics** was invented by Isaac Asimov in 1942.

**Autonomous** (literally) (gr.) "living by one's own laws"  
(*Auto*: Self; *nomos*: Law)

**Personal Robot** a small, mobile robot system with simple skills regarding vision system, speech, movement, etc. (from 1980).

**Service Robot** a mobile handling system featuring sensors for sophisticated operations in service areas (from 1989).

**Intelligent Robot, Cognitive Robot, Intelligent System ...**

# Degree of Freedom (DOF)

The number of independent coordinate planes or orientations on which a joint or end-point of a robot can move.


The DOF are determined by the number of independent variables of the control system.

- ▶ Point on a line
- ▶ Point on a plane
- ▶ Point in space
- ▶ Rigid body
  - ▶ on a surface
  - ▶ on a plane
  - ▶ in space
- ▶ Non-rigid body
- ▶ Manipulator
  - ▶ number of independently controllable joints
  - ▶ a robot should have at least two



80's toy robot (Quickshot)  
4-DOF + 1-DOF gripper


# DOF Examples (cont.)

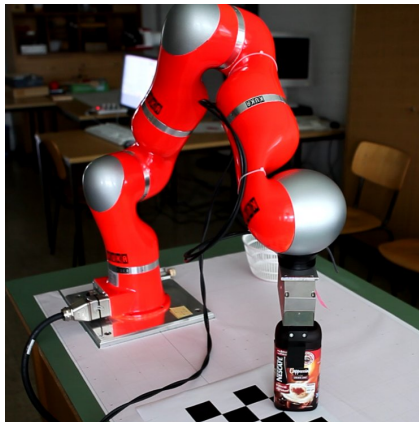

KUKA LWR 4+ arm with Schunk gripper  
7-DOF + 1-DOF gripper



# DOF Examples (cont.)

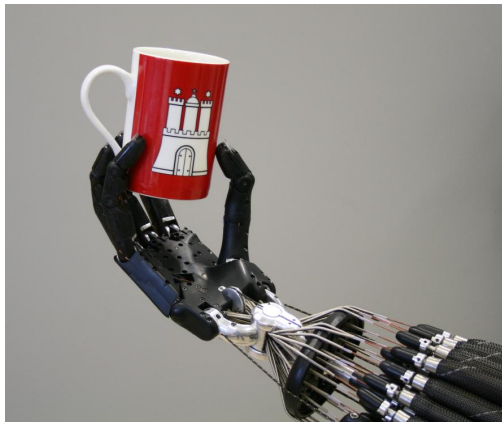

Shadow C5 Air Muscle hand  
20-DOF + 4 unactuated joints

# DOF Examples (cont.)



Boston Dynamics Atlas (2013)

28-DOF

# DOF Examples (cont.)



PR2 service robot with Shadow C6 electrical hand  
19-DOF + 20-DOF gripper



by input power source

- ▶ electrical
- ▶ hydraulic
- ▶ pneumatic



by field of work

- ▶ stationary
  - ▶ arms with 2 DOF
  - ▶ arms with 3 DOF
  - ▶ ...
  - ▶ arms with 6 DOF
  - ▶ redundant arms ( $> 6$  DOF)
  - ▶ multi-finger hand
- ▶ mobile
  - ▶ automated guided vehicles
  - ▶ portal robot
  - ▶ mobile platform
  - ▶ running machines and flying robots
  - ▶ anthropomorphic robots (humanoids)



# Robot Classification (cont.)

by type of joint

- ▶ translatory
  - ▶ linear
  - ▶ prismatic
- ▶ rotatory
  - ▶ revolute
- ▶ combinations
  - ▶ ball
  - ▶ cylindrical
  - ▶ polar
  - ▶ cartesian

by robot coordinate system


- ▶ cartesian
- ▶ cylindrical
- ▶ spherical / polar
- ▶ SCARA
- ▶ joint-arm





by usage

- ▶ object manipulation
- ▶ object modification
- ▶ object processing
- ▶ transport
- ▶ assembly
- ▶ quality testing
- ▶ deployment in non-accessible areas
- ▶ agriculture and forestry
- ▶ underwater
- ▶ building industry
- ▶ service robot in medicine, housework, ...

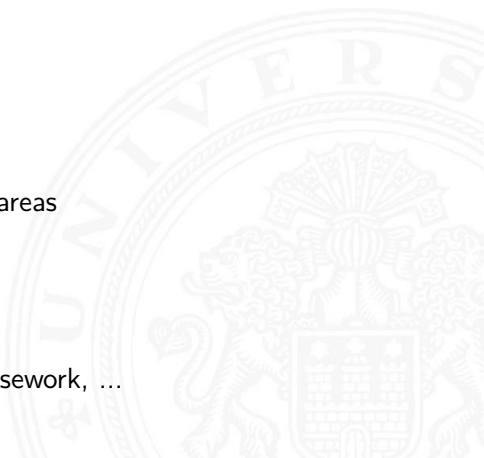



by intelligence

- ▶ manual control
- ▶ programmable for repeated movements
- ▶ featuring cognitive ability and responsiveness
- ▶ adaptive on task level





- ▶ robots move — computers don't
- ▶ interdisciplinarity
  - ▶ soft- and hardware technology
  - ▶ sensor technology
  - ▶ mechatronics
  - ▶ control engineering
  - ▶ multimedia, ...
- ▶ A dream of mankind:  
*Computers are the most ingenious product of human laziness to date.*

computers  $\Rightarrow$  robots

Slides and literature references @

<http://tams.informatik.uni-hamburg.de/lectures/>

- ▶ K. Fu, R. González, and C. Lee, *Robotics: Control, Sensing, Vision, and Intelligence*. McGraw-Hill series in CAD/CAM robotics and computer vision, McGraw-Hill, 1987
- ▶ R. Paul, *Robot Manipulators: Mathematics, Programming, and Control: the Computer Control of Robot Manipulators*. Artificial Intelligence Series, MIT Press, 1981
- ▶ J. Craig, *Introduction to Robotics: Pearson New International Edition: Mechanics and Control*. Always learning, Pearson Education, Limited, 2013



## Introduction

## Coordinate systems

- Concatenation of rotation matrices

- Inverse transformation

- Transformation equation

- Summary of homogeneous transformations

- Outlook

## Kinematic Equations

## Robot Description


## Inverse Kinematics for Manipulators

## Differential motion with homogeneous transformations

## Jacobian

## Trajectory planning

## Trajectory generation

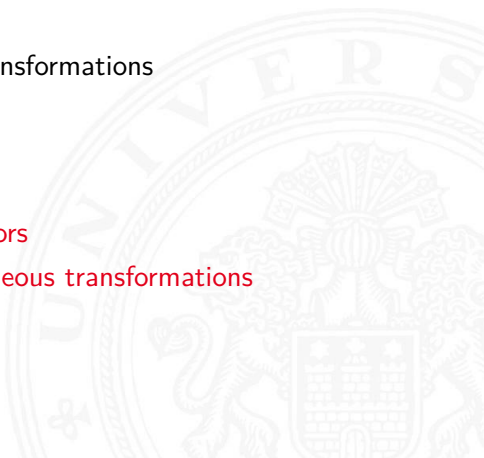



# Outline (cont.)

Coordinate systems

Introduction to Robotics

Dynamics

Principles of Walking

Robot Control

Task-Level Programming and Trajectory Generation

Task-level Programming and Path Planning

Task-level Programming and Path Planning


Architectures of Sensor-based Intelligent Systems

Summary

Conclusion and Outlook




The **pose** of objects, in other words their **location** and **orientation** in Euclidian space can be described through specification of a cartesian coordinate system (**CS**) in relation to a base coordinate system (**B**).

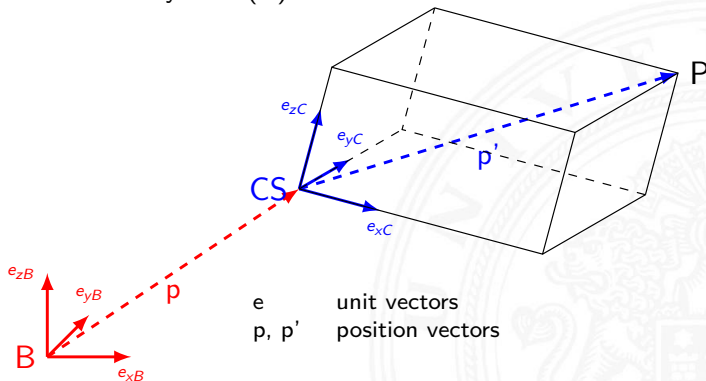

# Specification of location and orientation

Position (object coordinates):

- ▶ translation along the axes of the base coordinate system (**B**)


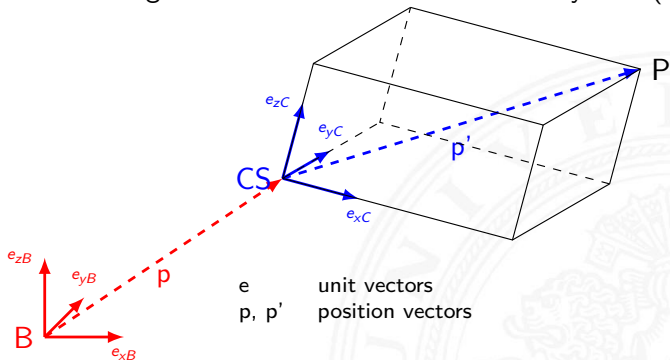


- ▶ given by  $\mathbf{p} = [p_x, p_y, p_z]^T \in \mathcal{R}^3$

# Specification of location and orientation (cont.)

## Orientation (in space):

- ▶ Euler-angles  $\varphi, \theta, \psi$ 
  - ▶ rotations are performed successively around the axes, e. g.  $ZY'X''$  or  $ZX'Z''$  (12 possibilities!)
  - ▶ order depends on reference coordinates
  - ▶ object (right), world (left)
  - ▶ Gimbal lock!
- ▶ Roll-Pitch-Yaw
  - ▶ specific case of Euler-angles (used in aviation and maritime)
  - ▶ rotation with respect to **object** axes (x – Roll, y – Pitch, z – Yaw)
- ▶ given by Rotation-matrix  $R \in \mathcal{R}^{3 \times 3}$ 
  - ▶ redundant; 9 parameters for 3 DOF



$$R = \begin{bmatrix} r_{11} & r_{21} & r_{31} \\ r_{12} & r_{22} & r_{32} \\ r_{13} & r_{23} & r_{33} \end{bmatrix}$$

# Specification of location and orientation (cont.)

▶ **Position:**

- ▶ given through  $\vec{p} \in \mathcal{R}^3$

▶ **Orientation:**

- ▶ given through projection  $\vec{n}, \vec{o}, \vec{a} \in \mathcal{R}^3$  of the axes of the CS to the origin system
- ▶ summarized to rotation matrix  $R = \begin{bmatrix} \vec{n} & \vec{o} & \vec{a} \end{bmatrix} \in \mathcal{R}^{3 \times 3}$
- ▶ redundant, since there are 9 parameters for 3 degrees of freedom
- ▶ other kinds of representation possible, e.g. *roll, pitch, yaw* angle, quaternions etc.




► Transform of Coordinate systems:

frame: a reference CS

*typical frames:*

- robot base
- end-effector
- table (world)
- object
- camera
- screen
- ...

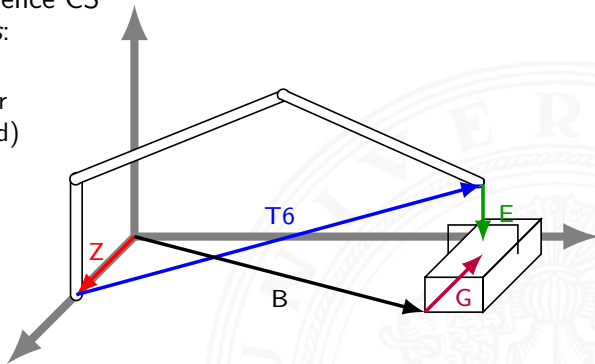

Frame-transformations transform one frame into another.

${}^A T_B$  transforms frame  $A$  to frame  $B$  (Latex:  $\hat{\{A\}}T_{\{B\}}$ )

# Homogenous transformation

- ▶ Combination of  $\vec{p}$  and  $R$  to  $T = \begin{bmatrix} R & \vec{p} \\ \vec{0} & 1 \end{bmatrix} \in \mathcal{R}^{4 \times 4}$
- ▶ Concatenation of several  $T$  through matrix multiplication
  - ▶  ${}^A T_B {}^B T_C = {}^A T_C$
- ▶ not commutative, in other words  ${}^B T_C {}^A T_B \neq {}^A T_B {}^B T_C$

# Homogenous transformation (cont.)

- ▶ Homogeneous transformation matrices:

$$T = \begin{bmatrix} R & \vec{p} \\ P & S \end{bmatrix}$$

where  $P$  depicts the perspective transformation and  $S$  the scaling.

- ▶ In robotics,  $P = \begin{bmatrix} 0 & 0 & 0 \end{bmatrix}$  and  $S = 1$ . Other values are used for computer graphics.



A translation with a vector  $[p_x, p_y, p_z]^T$  is expressed through a transformation  $H$ :


$$H = T_{(p_x, p_y, p_z)} = \begin{bmatrix} 1 & 0 & 0 & p_x \\ 0 & 1 & 0 & p_y \\ 0 & 0 & 1 & p_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

(shortened representation:  $S$  : sin,  $C$  : cos)

The transformation corresponding to a rotation around the x-axis with angle  $\varphi$  (*phi*):

$$R_{x,\varphi} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & C\varphi & -S\varphi & 0 \\ 0 & S\varphi & C\varphi & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

# Rotatory transformation (cont.)

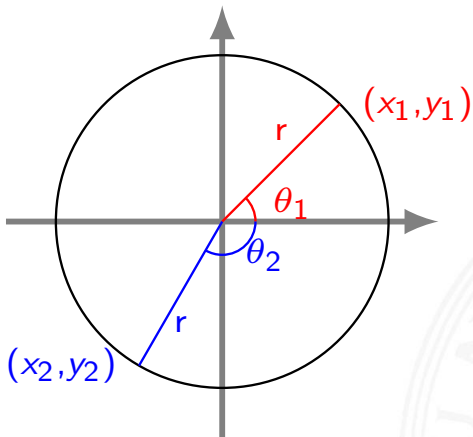

Coordinates of a circle

$$x = r \sin \theta, y = r \cos \theta$$

# Rotatory transformation (cont.)

The transformation corresponding to a rotation around the  $y$ -axis with angle  $\theta$  (*theta*):

$$R_{y,\theta} = \begin{bmatrix} C\theta & 0 & S\theta & 0 \\ 0 & 1 & 0 & 0 \\ -S\theta & 0 & C\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

# Rotatory transformation (cont.)

The transformation corresponding to a rotation around the z-axis with angle  $\psi$  (*psi*):

$$R_{z,\psi} = \begin{bmatrix} C\psi & -S\psi & 0 & 0 \\ S\psi & C\psi & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$




# Rotatory transformation (cont.)

Signs of transformations:

$$R = \begin{bmatrix} + & - & + & 0 \\ + & + & - & 0 \\ - & + & + & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Sequential multiplication of the transformation matrices by order of rotation.

1. rotation  $\varphi$  around the  $x$ -axis  
 $R_{x,\varphi}$  – Roll
2. rotation  $\theta$  around the  $y$ -axis  
 $R_{y,\theta}$  – Pitch
3. rotation  $\psi$  around the  $z$ -axis  
 $R_{z,\psi}$  – Yaw

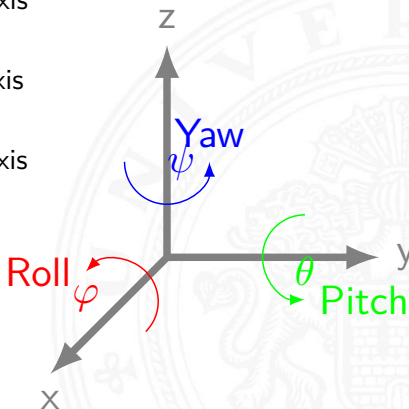

# Concatenation of rotation matrices

$$\begin{aligned} R_{\psi,\theta,\varphi} &= R_{z,\psi} R_{y,\theta} R_{x,\varphi} \\ &= \begin{bmatrix} C\psi & -S\psi & 0 & 0 \\ S\psi & C\psi & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} C\theta & 0 & S\theta & 0 \\ 0 & 1 & 0 & 0 \\ -S\theta & 0 & C\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & C\varphi & -S\varphi & 0 \\ 0 & S\varphi & C\varphi & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \\ &= \begin{bmatrix} C\psi C\theta & C\psi S\theta S\varphi - S\psi C\varphi & C\psi S\theta C\varphi + S\psi S\varphi & 0 \\ S\psi C\theta & S\psi S\theta S\varphi + C\psi C\varphi & S\psi S\theta C\varphi - C\psi S\varphi & 0 \\ -S\theta & C\theta S\varphi & C\theta C\varphi & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \end{aligned}$$

*Remark:* Matrix multiplication is not commutative:

$$AB \neq BA$$

They are represented as four vectors using the elements of homogeneous transformation.

$$H = \begin{bmatrix} \mathbf{r}_1 & \mathbf{r}_2 & \mathbf{r}_3 & \mathbf{p} \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{21} & r_{31} & p_x \\ r_{12} & r_{22} & r_{32} & p_y \\ r_{13} & r_{23} & r_{33} & p_z \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (1)$$

The inverse of a rotation matrix is simply its transpose:

$$R^{-1} = R^T \text{ and } RR^T = I$$

whereas  $I$  is the identity matrix.


The inverse of (1) is:

$$H^{-1} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & -\mathbf{p}^T \cdot \mathbf{r}_1 \\ r_{21} & r_{22} & r_{23} & -\mathbf{p}^T \cdot \mathbf{r}_2 \\ r_{31} & r_{32} & r_{33} & -\mathbf{p}^T \cdot \mathbf{r}_3 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

whereas  $\mathbf{r}_1$ ,  $\mathbf{r}_2$ ,  $\mathbf{r}_3$  and  $\mathbf{p}$  are the four column vectors of (1) and  $\cdot$  represents the scalar product of vectors.

One has the following transformations:


- ▶  $Z$ :  
World  $\rightarrow$  Manipulator base
- ▶  $T_6$ :  
Manipulator base  $\rightarrow$  Manipulator end
- ▶  $E$ :  
Manipulator end  $\rightarrow$  Endeffector
- ▶  $B$ :  
World  $\rightarrow$  Object
- ▶  $G$ :  
Object  $\rightarrow$  Endeffector

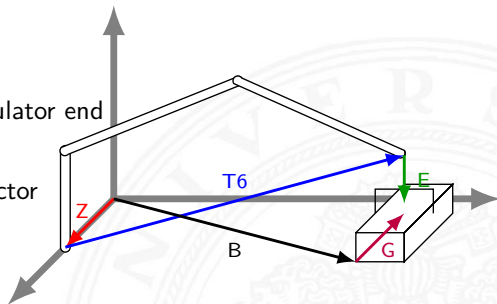

# Transformation equation

There are two descriptions for the desired endeffector position, one in relation to the object and the other in relation to the manipulator. Both descriptions should equal to each other for grasping:

$$ZT_6E = BG$$



In order to find the manipulator transformation:

$$T_6 = Z^{-1}BGE^{-1}$$

In order to determine the position of the object:


$$B = ZT_6EG^{-1}$$

This is also called kinematic chain.

# Example: coordinate transformation

Coordinate systems - Transformation equation

Introduction to Robotics

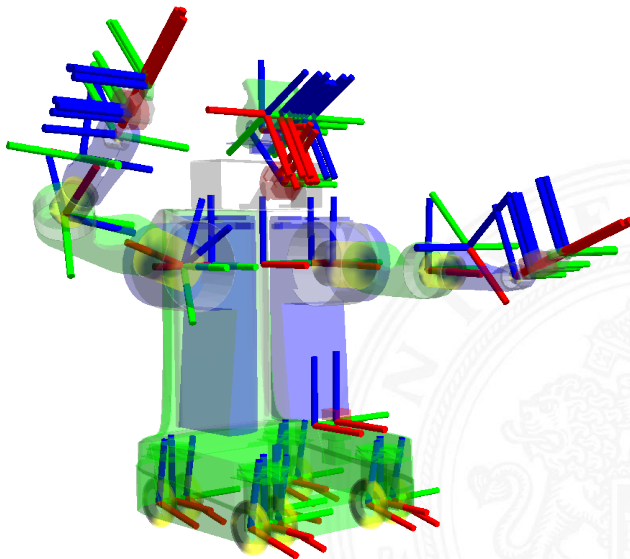





# Summary of homogeneous transformations

- ▶ A homogeneous transformation depicts the position and orientation of a coordinate frame in space.
- ▶ If the coordinate frame is defined in relation to a solid object, the position and orientation of the solid object is unambiguously specified.
- ▶ The depiction of an object  $A$  can be derived from a homogeneous transformation relating to object  $A'$ . This is also possible the other way around using inverse transformation.

# Summary of homogeneous transformations (cont.)

- ▶ Several translations and rotations can be multiplied. The following applies:
  - ▶ If the rotations / translations are performed in relation to the **current, newly defined (or changed)** coordinate system, the newly added transformation matrices need to be multiplicatively appended on the **right-hand** side.
  - ▶ If all of them are performed in relation to the **fixed** reference coordinate system, the transformation matrices need to be multiplicatively appended on the **left-hand side**.
- ▶ A homogeneous transformation can be segmented into a rotational and a translational part.

## Reduction to area of interest

For grasping, position and orientation of the robot **gripper** are of interest.

The robot itself is reduced to a single transformation and treated as a solid object.

- ▶ Joint coordinates:

A vector  $\mathbf{q}(t) = (q_1(t), q_2(t), \dots, q_n(t))^T$   
(a robot configuration)

- ▶ Endeffector coordinates  
(Object coordinates):

A Vector  $\mathbf{p} = [p_x, p_y, p_z]^T$

- ▶ Description of orientations:

- ▶ Euler angle  $\varphi, \theta, \psi$
- ▶ Rotation matrix:

$$R = \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix}$$

# Outlook: Denavit-Hartenberg Convention

- ▶ Definition of one coordinate system per segment  $i = 1..n$
- ▶ Definition of 4 parameters per segment  $i = 1..n$
- ▶ Definition of one transformation  $A_i$  per segment  $i = 1..n$
- ▶  $T_6 = \prod_{i=1}^n A_i$

## Outlook

Later Denavit Hartenberg Convention will be presented in more detail!

- ▶ The direct kinematic problem:  
Given the joint values and geometrical parameters of all joints of a manipulator, how is it possible to determine the position and orientation of the manipulator's endeffector?
- ▶ The inverse kinematic problem:  
Given a desired position and orientation of the manipulator's endeffector and the geometrical parameters of all joints, is it possible for the manipulator to reach this position / orientation? If it is, how many manipulator configurations are capable of matching these conditions?

## Example

A two-joint-manipulator moving on a plane

$T_6$  defines, how the  $n$  joint angles are supposed to be consolidated to 12 non-linear formulas in order to describe 6 cartesian degrees of freedom.

- ▶ Forward kinematics  $K$  defined as:
  - ▶  $K : \vec{\theta} \in \mathcal{R}^n \rightarrow \vec{x} \in \mathcal{R}^6$
  - ▶ Joint angle  $\rightarrow$  Position + Orientation
- ▶ Inverse kinematics  $K^{-1}$  defined as:
  - ▶  $K^{-1} : \vec{x} \in \mathcal{R}^6 \rightarrow \vec{\theta} \in \mathcal{R}^n$
  - ▶ Position + Orientation  $\rightarrow$  Joint angle
  - ▶ non-trivial, since  $K$  is usually not unambiguously invertible

Non-linear kinematics  $K$  can be linearized through the *Taylor series*

$$f(x) = \sum_{n=0}^{\infty} \frac{f^{(n)}(x_0)}{n!} (x - x_0)^n.$$

- ▶ The Jacobian matrix  $J$  as factor for  $n = 1$  of the multi-dimensional Taylor series is defined as:
  - ▶  $J(\vec{\theta}) : \dot{\vec{\theta}} \in \mathcal{R}^n \rightarrow \dot{\vec{x}} \in \mathcal{R}^6$
  - ▶ Joint speed  $\rightarrow$  cartesian speed
- ▶ Inverse Jacobian matrix  $J^{-1}$  defined as:
  - ▶  $J^{-1}(\vec{\theta}) : \dot{\vec{x}} \in \mathcal{R}^6 \rightarrow \dot{\vec{\theta}} \in \mathcal{R}^n$
  - ▶ cartesian speed  $\rightarrow$  Joint speed
  - ▶ non-trivial, since  $J$  not necessarily invertible (e.g. not quadratic)



Since  $T_6$  describes only the target **position**, explicit generation of a trajectory is necessary.

Depending on *constraints* different for:

- ▶ joint angle space
- ▶ cartesian space

Interpolation through:

- ▶ piecewise straight lines
- ▶ piecewise polynoms
- ▶ B-Splines
- ▶ ...

- ▶ Read (available on google & library):
  - ▶ J. F. Engelberger, *Robotics in service*. MIT Press, 1989
  - ▶ K. Fu, R. González, and C. Lee, *Robotics: Control, Sensing, Vision, and Intelligence*. McGraw-Hill series in CAD/CAM robotics and computer vision, McGraw-Hill, 1987
  - ▶ R. Paul, *Robot Manipulators: Mathematics, Programming, and Control: the Computer Control of Robot Manipulators*. Artificial Intelligence Series, MIT Press, 1981
  - ▶ J. Craig, *Introduction to Robotics: Pearson New International Edition: Mechanics and Control*. Always learning, Pearson Education, Limited, 2013
- ▶ Repeat your linear algebra knowledge, especially regarding elementary algebra of matrices.



- [1] K. Fu, R. González, and C. Lee, *Robotics: Control, Sensing, Vision, and Intelligence*.  
McGraw-Hill series in CAD/CAM robotics and computer vision,  
McGraw-Hill, 1987.
- [2] R. Paul, *Robot Manipulators: Mathematics, Programming, and Control: the Computer Control of Robot Manipulators*.  
Artificial Intelligence Series, MIT Press, 1981.
- [3] J. Craig, *Introduction to Robotics: Pearson New International Edition: Mechanics and Control*.  
Always learning, Pearson Education, Limited, 2013.
- [4] J. F. Engelberger, *Robotics in service*.  
MIT Press, 1989.
- [5] W. Böhm, G. Farin, and J. Kahmann, "A Survey of Curve and Surface Methods in CAGD," *Comput. Aided Geom. Des.*, vol. 1, pp. 1–60, July 1984.



- [6] J. Zhang and A. Knoll, “Constructing Fuzzy Controllers with B-spline Models - Principles and Applications,” *International Journal of Intelligent Systems*, vol. 13, no. 2-3, pp. 257–285, 1998.
- [7] M. Eck and H. Hoppe, “Automatic Reconstruction of B-spline Surfaces of Arbitrary Topological Type,” in *Proceedings of the 23rd Annual Conference on Computer Graphics and Interactive Techniques, SIGGRAPH '96*, (New York, NY, USA), pp. 325–334, ACM, 1996.
- [8] M. C. Ferch, *Lernen von Montagestrategien in einer verteilten Multiroboterumgebung*. PhD thesis, Bielefeld University, 2001.
- [9] J. H. Reif, “Complexity of the Mover’s Problem and Generalizations - Extended Abstract,” *Proceedings of the 20th Annual IEEE Conference on Foundations of Computer Science*, pp. 421–427, 1979.



- [10] J. T. Schwartz and M. Sharir, "A Survey of Motion Planning and Related Geometric Algorithms," *Artificial Intelligence*, vol. 37, no. 1, pp. 157–169, 1988.
- [11] J. Canny, *The Complexity of Robot Motion Planning*. MIT press, 1988.
- [12] T. Lozano-Pérez, J. L. Jones, P. A. O'Donnell, and E. Mazer, *Handey: A Robot Task Planner*. Cambridge, MA, USA: MIT Press, 1992.
- [13] O. Khatib, "The Potential Field Approach and Operational Space Formulation in Robot Control," in *Adaptive and Learning Systems*, pp. 367–377, Springer, 1986.
- [14] J. Barraquand, L. Kavraki, R. Motwani, J.-C. Latombe, T.-Y. Li, and P. Raghavan, "A Random Sampling Scheme for Path Planning," in *Robotics Research* (G. Giralt and G. Hirzinger, eds.), pp. 249–264, Springer London, 1996.



- [15] R. Geraerts and M. H. Overmars, “A Comparative Study of Probabilistic Roadmap Planners,” in *Algorithmic Foundations of Robotics V*, pp. 43–57, Springer, 2004.
- [16] K. Nishiwaki, J. Kuffner, S. Kagami, M. Inaba, and H. Inoue, “The Experimental Humanoid Robot H7: A Research Platform for Autonomous Behaviour,” *Philosophical Transactions of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*, vol. 365, no. 1850, pp. 79–107, 2007.
- [17] R. Brooks, “A robust layered control system for a mobile robot,” *Robotics and Automation, IEEE Journal of*, vol. 2, pp. 14–23, Mar 1986.
- [18] M. J. Mataric, “Interaction and intelligent behavior.,” tech. rep., DTIC Document, 1994.
- [19] M. P. Georgeff and A. L. Lansky, “Reactive reasoning and planning.,” in *AAAI*, vol. 87, pp. 677–682, 1987.



- [20] J. Zhang and A. Knoll, *Integrating Deliberative and Reactive Strategies via Fuzzy Modular Control*, pp. 367–385. Heidelberg: Physica-Verlag HD, 2001.
- [21] J. S. Albus, “The nist real-time control system (rcs): an approach to intelligent systems research,” *Journal of Experimental & Theoretical Artificial Intelligence*, vol. 9, no. 2-3, pp. 157–174, 1997.
- [22] A. Meystel, “Nested hierarchical control,” 1993.
- [23] G. Saridis, “Machine-intelligent robots: A hierarchical control approach,” in *Machine Intelligence and Knowledge Engineering for Robotic Applications* (A. Wong and A. Pugh, eds.), vol. 33 of *NATO ASI Series*, pp. 221–234, Springer Berlin Heidelberg, 1987.
- [24] T. Fukuda and T. Shibata, “Hierarchical intelligent control for robotic motion by using fuzzy, artificial intelligence, and neural network,” in *Neural Networks, 1992. IJCNN., International Joint Conference on*, vol. 1, pp. 269–274 vol.1, Jun 1992.



- [25] R. C. Arkin and T. Balch, "Aura: principles and practice in review," *Journal of Experimental & Theoretical Artificial Intelligence*, vol. 9, no. 2-3, pp. 175–189, 1997.
- [26] E. Gat, "Integrating reaction and planning in a heterogeneous asynchronous architecture for mobile robot navigation," *ACM SIGART Bulletin*, vol. 2, no. 4, pp. 70–74, 1991.
- [27] L. Einig, *Hierarchical Plan Generation and Selection for Shortest Plans based on Experienced Execution Duration*.  
Master thesis, Universität Hamburg, 2015.
- [28] J. Craig, *Introduction to Robotics: Mechanics & Control. Solutions Manual*.  
Addison-Wesley Pub. Co., 1986.
- [29] H. Siegert and S. Bocionek, *Robotik: Programmierung intelligenter Roboter: Programmierung intelligenter Roboter*.  
Springer-Lehrbuch, Springer Berlin Heidelberg, 2013.





- [30] R. Schilling, *Fundamentals of robotics: analysis and control*.  
Prentice Hall, 1990.
- [31] T. Yoshikawa, *Foundations of Robotics: Analysis and Control*.  
Cambridge, MA, USA: MIT Press, 1990.
- [32] M. Spong, *Robot Dynamics And Control*.  
Wiley India Pvt. Limited, 2008.

